


# 691

活塞压力开关带可调节旋钮  
Piston pressure switch with adjusting knob

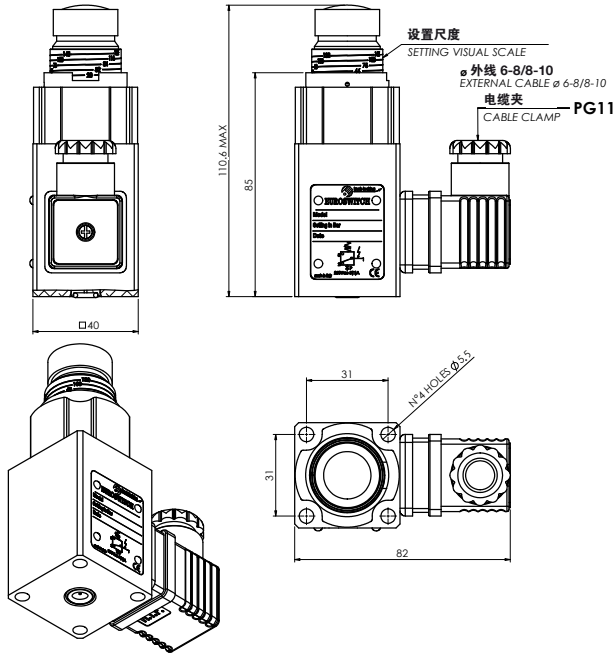

代码 - Part Number	设定范围 Setting range bar	20°C公差 Tolerance
691 2 3 0 1 5	8 - 150	± 2%
691 2 3 0 1 6	40 - 400	± 2%
900 bar	最大安全压力 - Max Overpressure limit	

本体	阳极氧化铝
电触点	银SPDT
液体最高温度	100°C
电气特性	5 (4) A / 14 Vdc 4 (3) A / 30 Vdc 5 (3) A / 125 Vac 5 (1) A / 250 Vac
固定迟滞	约为设定值的10%
启动模式	1B
外部污染情况	正常
机械工作寿命	10 <sup>6</sup> 次
固定歧管连接	
保护级别	IP65
连接器符合UNI EN 175301-803 (DIN43650)规定	
■密封	丁腈橡胶+特氟隆 (见第12页)
重量	约360 gr 提供垫片和固定螺丝

Case	Anodized aluminium
Electric contacts	SPDT Silver
Max fluid temperature	100°C
Electrical characteristics	5 (4) A / 14 Vdc 4 (3) A / 30 Vdc 5 (3) A / 125 Vac 5 (1) A / 250 Vac
Fixed hysteresis	approximately 10% of setting value
Action type	1B
External pollution situation	normal
Mechanical working life	10 <sup>6</sup> operations
Fixing	Manifold connection
Protection degree	IP65
with connector according to UNI EN 175301-803 (DIN43650)	
■ Seal	NBR+Teflon (see page 12)
Weight	360 gr (Approximately) Supplied with gasket and fixing screws

a correct use please refer to "General Notes" in the pressure switches Euroswitch catalogue, edition 2012.



南京库克自动化设备有限公司

电话：025-85549526

传真：025-85542773

企业有权随时且不提前通知的情况下更改技术指标或停止生产  
The Company reserves the right to modify the technical features of the products or halt production at any time without notice.