


MOD.E

膜片式压力开关-内螺纹  
Diaphragm pressure switch - female case

≤ 48V

≤ 48V

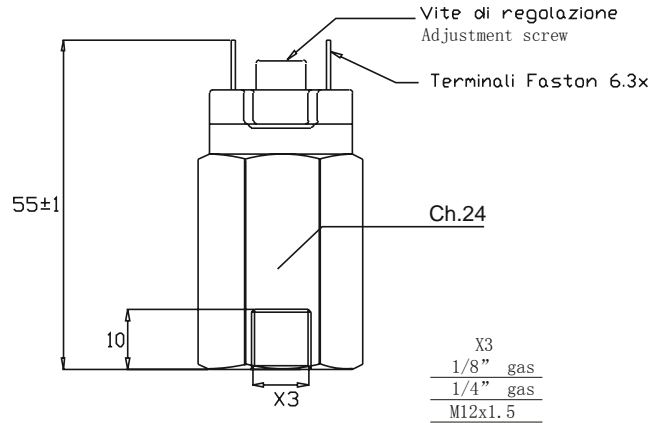

本体	碳钢镀锌
电气触点	镀银 (或镀金触点)
电气连接	NO (灰) NC (黑)
电压负载	48 V
电流负载	0.5 (0.2) A
最高耐温	80-120°C (取决于膜片)
机械寿命	10 <sup>6</sup> 次
动作方式	1B
环境污染	正常
防护等级	IP 00
带3015001保护盖	IP 54 (见附页)
带3900001保护帽	IP 65 (见附页)
参照EN 60730-1标准	
<input type="checkbox"/> 膜片形式	
1 NBR-2 FKM (标准) -3 EPDMCH-4 CR-5 Silicon-6 HNBR	
重量	125 g

• Case	Zinc plated steel
• Electric contact	Silver Plated, on request gold plated
• Electric al condition	N.O. (grey) N.C. (black)
• Max switched voltage	48 V
• Max switched current	0.5 (0.2) A
• Max fluid temperature	80 to 120°C depending on diaphragm
• Mechanical working life	10 <sup>6</sup> operations
• Action type	1B
• Pollution situation	normal
• Protection degree	IP 00
with cover 3015001	IP 54 (see page 87)
with cap 3900001	IP 65 (see page 87)
• In accordance with EN 60730-1	
• <input type="checkbox"/> Insert diaphragm code (see page 86):	
1 NBR - 2 FKM (standard) - 3 EPDM CH - 4 CR - 5 Silicon - 6 HNBR	
• Weight	~ 125 gr

订货号 - Part Number		内螺纹 - female thread	设定范围 Setting range bar	宽容值 a 20° C Tolerance at 20° C bar
电气连接 - electrical contact				
常开 norm. open →	常闭 norm. closed →			
22 1 0 1 <input type="checkbox"/> 0	22 2 0 1 <input type="checkbox"/> 0	1/8" gas -	0.1 - 1	± 0.1
22 1 0 2 <input type="checkbox"/> 0	22 2 0 2 <input type="checkbox"/> 0	1/4" gas -		
22 1 0 4 <input type="checkbox"/> 0	22 2 0 4 <input type="checkbox"/> 0	M12x1.5		
22 1 0 1 <input type="checkbox"/> 1	22 2 0 1 <input type="checkbox"/> 1	1/8" gas -	1 - 5	± 0.3
22 1 0 2 <input type="checkbox"/> 1	22 2 0 2 <input type="checkbox"/> 1	1/4" gas -		
22 1 0 4 <input type="checkbox"/> 1	22 2 0 4 <input type="checkbox"/> 1	M12x1.5		
22 1 0 1 <input type="checkbox"/> 2	22 2 0 1 <input type="checkbox"/> 2	1/8" gas cilindrico -	1 - 10	± 0.5
22 1 0 2 <input type="checkbox"/> 2	22 2 0 2 <input type="checkbox"/> 2	1/4" gas -		
22 1 0 4 <input type="checkbox"/> 2	22 2 0 4 <input type="checkbox"/> 2	M12x1.5		
22 1 0 1 <input type="checkbox"/> 3	22 2 0 1 <input type="checkbox"/> 3	1/8" gas cilindrico cylindrical	10 - 20	± 1.0
22 1 0 2 <input type="checkbox"/> 3	22 2 0 2 <input type="checkbox"/> 3	1/4" gas		
22 1 0 4 <input type="checkbox"/> 3	22 2 0 4 <input type="checkbox"/> 3	M12x1.5		
22 1 0 1 <input type="checkbox"/> 4	22 2 0 1 <input type="checkbox"/> 4	1/8" gas cilindrico cylindrical	20 - 50	± 2.0
22 1 0 2 <input type="checkbox"/> 4	22 2 0 2 <input type="checkbox"/> 4	1/4" gas		
22 1 0 4 <input type="checkbox"/> 4	22 2 0 4 <input type="checkbox"/> 4	M12x1.5		
300 bar		最高耐压 - Max static pressure		

正确选用请参照2008年出版样本上的技术参数。

For a correct use please refer to "General Notes" in the Euroswitch sensors catalogue, edition 10/2008.